Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ORION	
--------------------------------------	--

Supplier's address: Qualitätssicherung, Oberlaaerstraße 284, 1230 Wien, AT

Model identifier: LED 27a 27W SMD(312pcs) 1450x5mm Band 3000K


Type	of	light	source:
-,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,		0	

Lighting technology used:	LED	Non-directional or directional:	NDLS	
Light source cap-type	LED module			
(or other electric interface)				
Mains or non-mains:	NMLS	Connected light source (CLS):	No	
Colour-tuneable light source:	No	Envelope:	-	
High luminance light source:	No			
Anti-glare shield:	No	Dimmable:	Yes	
Product parameters				
Parameter	Value	Parameter	Value	

Product parameters					
Parameter		Value	Parameter	Value	
General product parameters:					
Energy consur mode (kWh/10 up to the neare	00 h), rounded	29	Energy efficiency class	Е	
Useful luminous flux (фuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)		3 545 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000	
On-mode power (P _{on}), expressed in W		29,0	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00	
(P _{net}) for CLS, 6	candby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	90	
Outer dimen-	Height	1 450	Spectral power dis-	See image	
sions without	Width	5	tribution in the	in last page	
separate con- trol gear, light- ing control	Depth	1	range 250 nm to 800 nm, at full-load		

parts and non- lighting con- trol parts, if any (millime- tre)			
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-
		Chromaticity coordi-	0,432
		nates (x and y)	0,395
Parameters for LED and OLED light sources:			
R9 colour rendering index value	67	Survival factor	1,00
the lumen maintenance factor	0,96		


(a)'-': not applicable; (b)'-': not applicable;




Page 17 of 20



Test Data Sheet 7: Luminous intensity distribution diagram

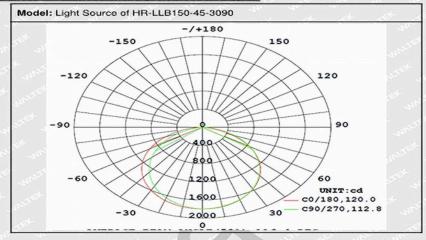

Test Data Sheet 8: Spectral power distribution

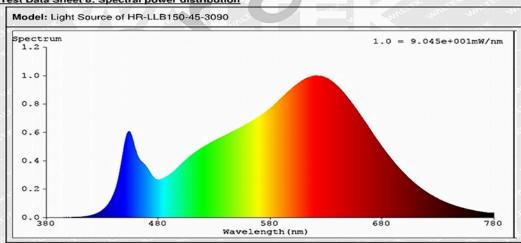

Waltek Testing Group (Foshan) Co., Ltd. http://www.waltek.com.cn

WT-510-201-12-A