

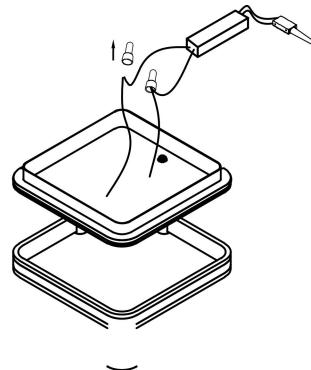





Tausch der fest verbauten LED Lichtquelle/Replacement of built in LED light source

LED Ausbau/LED removal

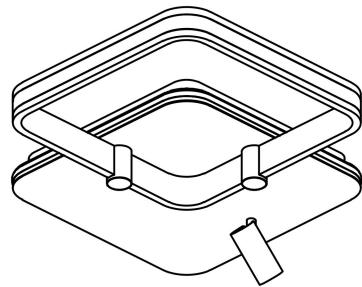

① Remove the nipple connecting the driver and power cord


② Remove the screws inside the base

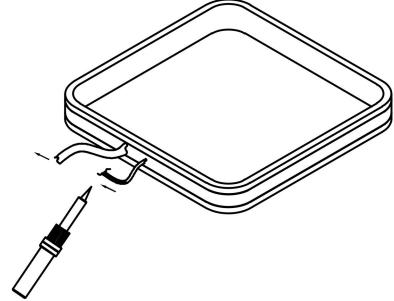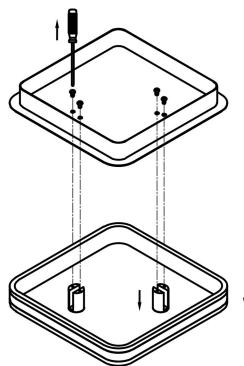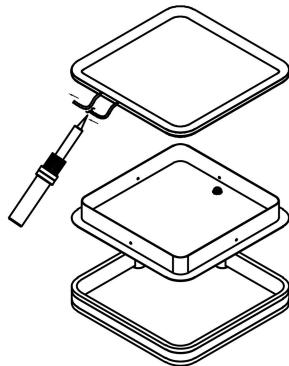


③ Remove the silicone strip from the aluminum frame and welding off the old LED

④ Remove the fixing components connecting the base and aluminum frame

⑤ Remove the silicone strip from the aluminum frame and welding off the old LED

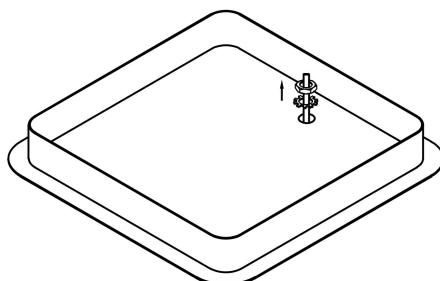


⑥ Remove the fixing nut of the spotlight from the base and remove the lamp head

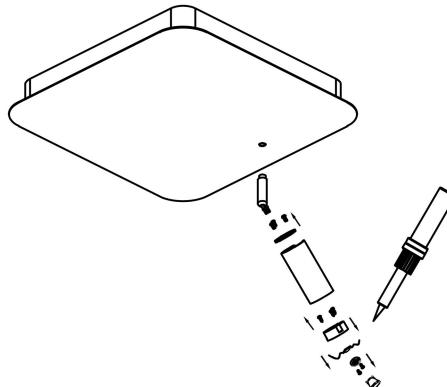


⑦ Remove the COB light source fixing components inside the spotlight, welding off the old COB

Tausch der fest verbauten LED Lichtquelle/Replacement of built in LED light source


LED Einbau/LED installation

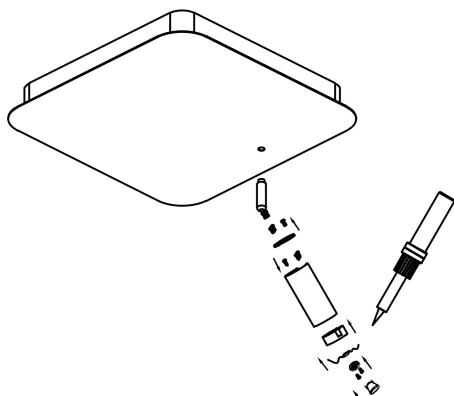


①Install COB light source fixing components inside the spotlight an welding up the new COB with cable

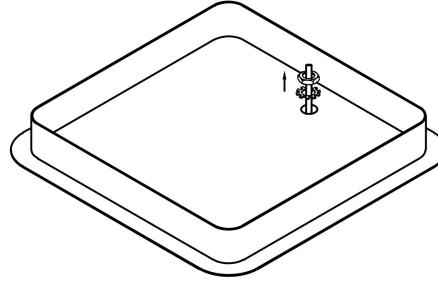


②Use nuts to regulate the lamp head onto the base

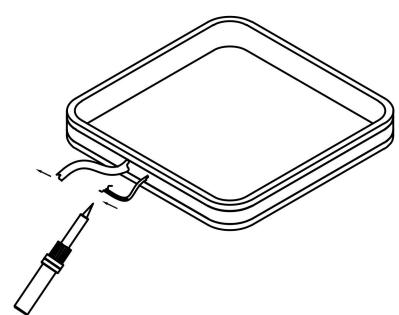


③Stick the LED strip on the aluminum frame and welding up with the cable,reinstall the silicone strip

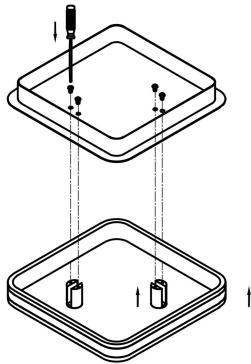


④screw up the fixing components connecting the base and aluminum frame

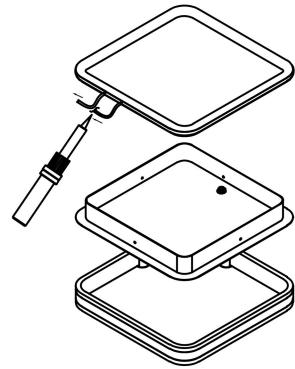


⑤Stick the LED strip on the base and welding up with the cable,reinstall the silicone strip



⑥Use screws to re fix the aluminum frame to the base




⑦Reconnect the driver and wires with nipple connecting

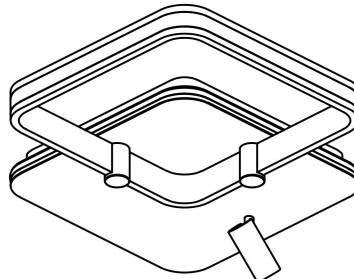

Tausch der fest verbauten LED Lichtquelle/Replacement of built in LED light source

LED Ausbau/LED removal

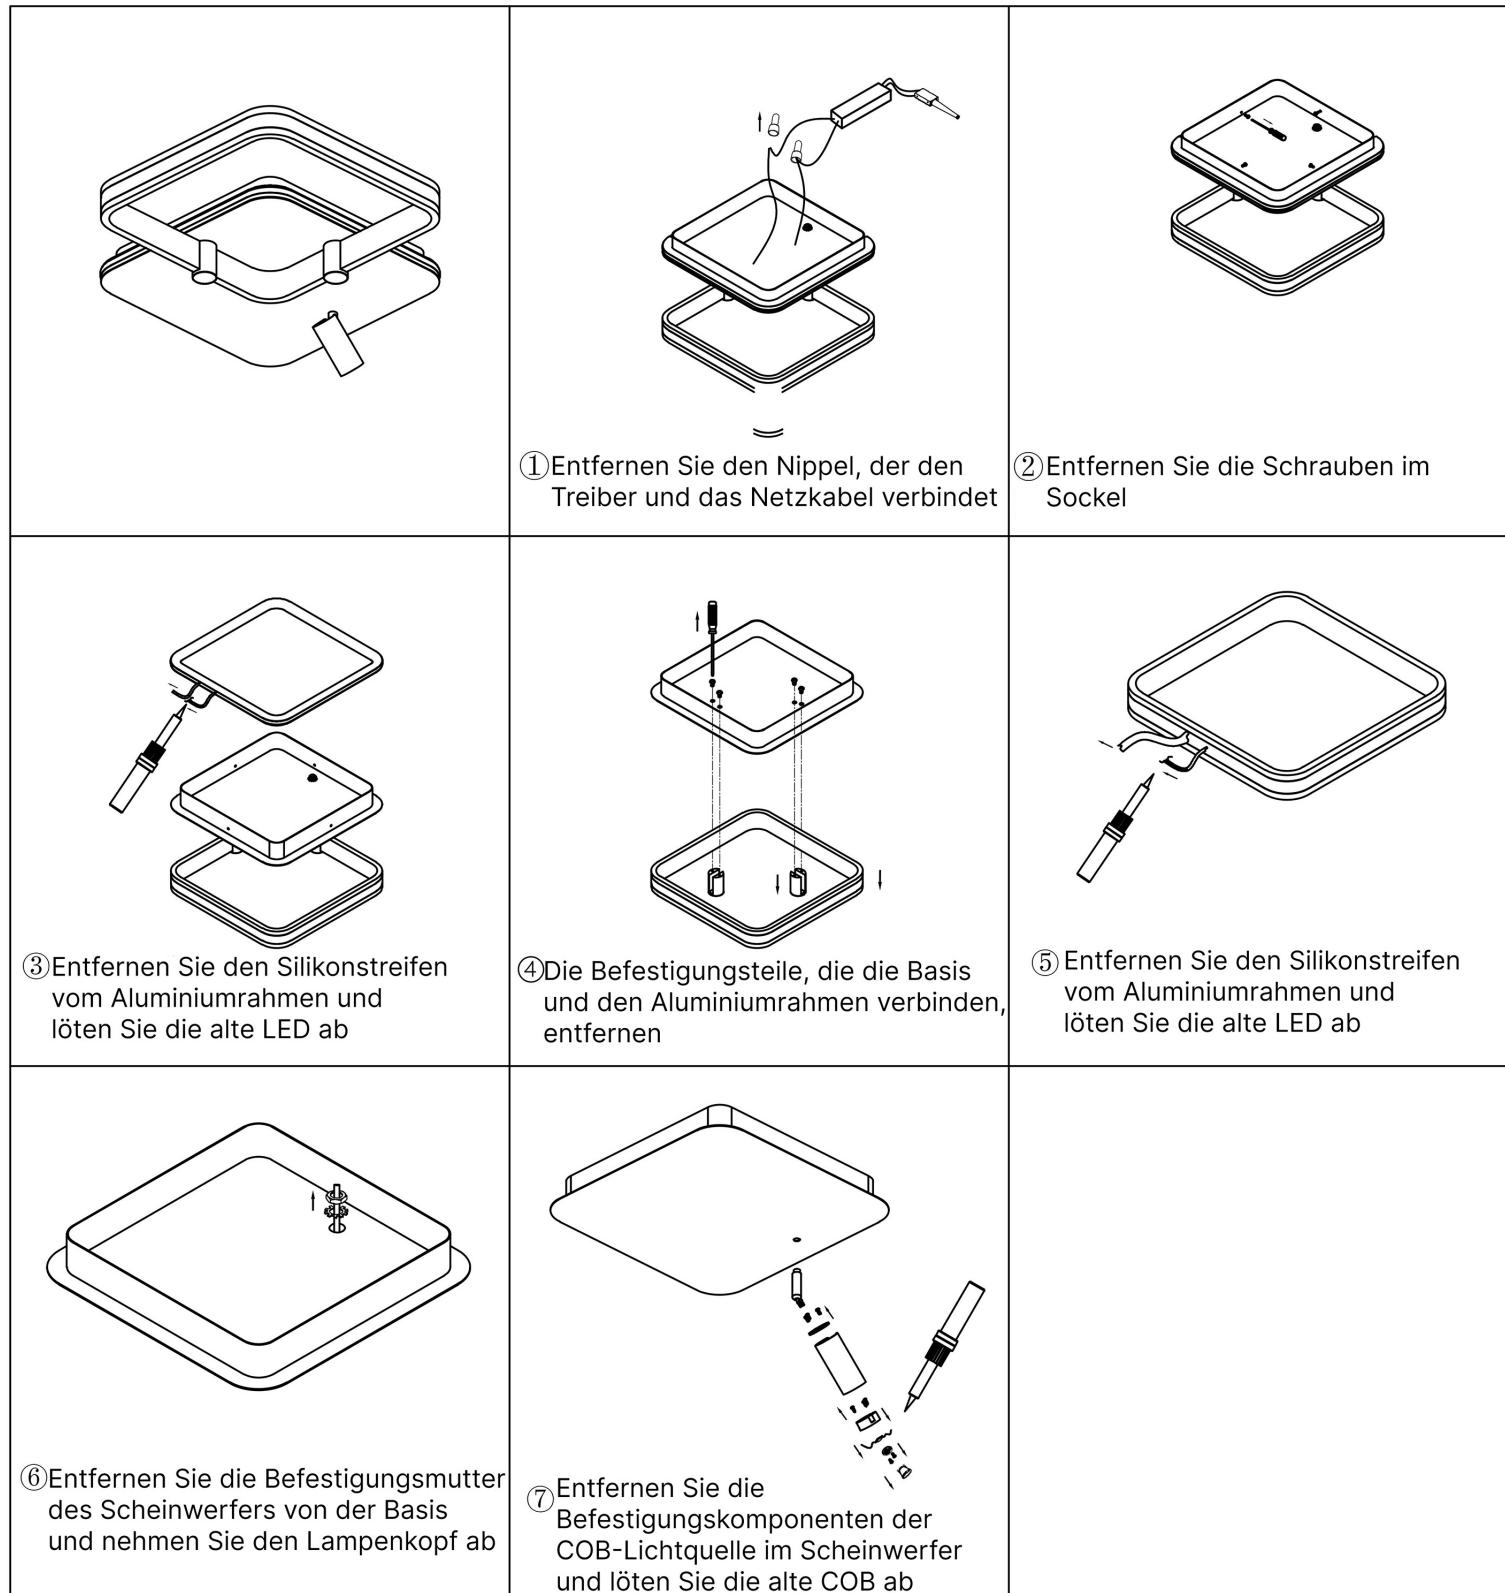

Tausch der fest verbauten LED Lichtquelle/Replacement of built in LED light source

LED Einbau/LED installation

