Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ORIO	V
--	---

Supplier's address: Qualitätssicherung, Oberlaaerstraße 284, 1230 Wien, AT

Model identifier: LED 20n 20W SMD(208pcs) D550mm 1/2 3000K

I V DC OI IISIIL JOUI CC	Type	of lig	tht s	ource:
--------------------------	------	--------	-------	--------

(P_{net}) for CLS, expressed in W

and rounded to the second dec-

Height

Width

Depth

imal

ing

Outer dimen-

sions without

separate con-

trol gear, light-

control

Type of light source:			
Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	LED module		
(or other electric interface)			
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes
	Product para	meters	
Parameter	Value	Parameter	Value
	General product	parameters:	
Energy consumption in on- mode (kWh/1000 h), rounded up to the nearest integer	23	Energy efficiency class	С
Useful luminous flux (φuse), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	4 000 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode power (P _{on}), ex- pressed in W	22,4	Standby power (P _{sb}), expressed in W and rounded to the sec- ond decimal	0,00
Networked standby power	-	Colour rendering in-	80
	i .	1	T. Control of the Con

275

550

1

dex, rounded to the

nearest integer, or the range of CRI-val-

ues that can be set

tribution

Spectral power dis-

range 250 nm to 800

nm, at full-load

in

the

See image

in last page

parts and non- lighting con- trol parts, if any (millime- tre)						
Claim of equivalent power ^(a)	-	If yes, equivalent power (W)	-			
		Chromaticity coordi-	0,437			
		nates (x and y)	0,403			
Parameters for LED and OLED light sources:						
R9 colour rendering index value	12	Survival factor	1,00			
the lumen maintenance factor	0,96					


(a)'-': not applicable; (b)'-': not applicable;




Page 17 of 20



Test Data Sheet 7: Luminous intensity distribution diagram

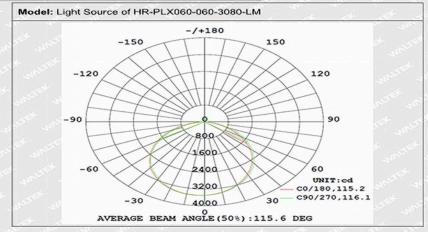

Test Data Sheet 8: Spectral power distribution

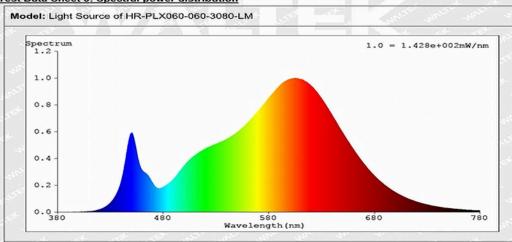

Waltek Testing Group (Foshan) Co., Ltd. http://www.waltek.com.cn

WT-510-201-12-A