

# Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

**Supplier's name or trade mark:** ORION

**Supplier's address:** QC, Oberlaaerstraße 284, 1230 Wien, AT

**Model identifier:** LM S14d/8W LED (Linienl./750lm/2700K)

## Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	S14d		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	No

## Product parameters

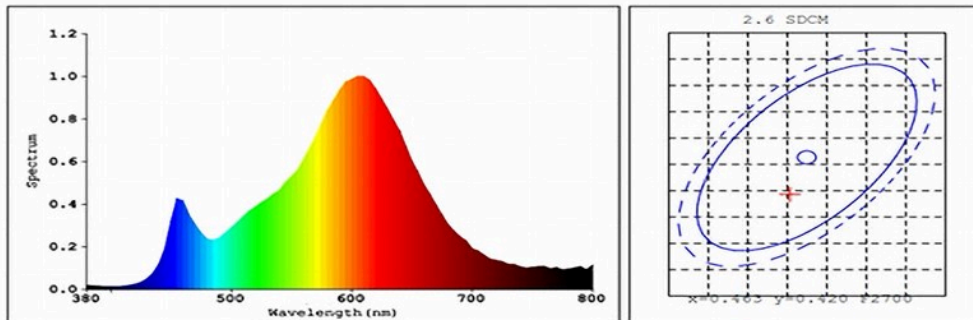
Parameter	Value	Parameter	Value
<b>General product parameters:</b>			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	8	Energy efficiency class	F
Useful luminous flux ( $\phi_{use}$ ), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	750 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power ( $P_{on}$ ), expressed in W	8,0	Standby power ( $P_{sb}$ ), expressed in W and rounded to the second decimal	0,00
Networked standby power ( $P_{net}$ ) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without	Height	Spectral power distribution in the	See image in last page
	Width		
	Depth		

separate control gear, lighting control parts and non-lighting control parts, if any (millimetre)		range 250 nm to 800 nm, at full-load	
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordinates (x and y)	0,462 0,420
<b>Parameters for LED and OLED light sources:</b>			
R9 colour rendering index value	4	Survival factor	1,00
the lumen maintenance factor	0,96		
<b>Parameters for LED and OLED mains light sources:</b>			
displacement factor (cos $\phi_1$ )	0,97	Colour consistency in McAdam ellipses	3
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4

(a): not applicable;

(b): not applicable;

S14D-50-8W

**Color Parameters:**Chromaticity Coordinate:  $x=0.4613$   $y=0.4157$ Chromaticity Coordinate:  $u'=0.2607$   $v'=0.5298$  ( $duv=-2.57e-03$ )

Tc=2751K Dominant WL:Ld=583.8nm Purity=51.2% Centroid WL:593.0nm

Ratio:R=25.6% G=71.9% B=2.5% Peak WL:Lp=605.0nm HWL:113.6nm

Render Index:Ra=81.6 CRI=76.3

R1 =80 R2 =91 R3 =95 R4 =79 R5 =81 R6 =90 R7 =81

R8 =57 R9 =4 R10=80 R11=77 R12=73 R13=83 R14=98 R15=73

**Photo Parameters:**

Flux: 766.53 lm Fe: 2.3272 W Efficacy:105.5 lm/W

**Electrical Parameters:**

Luminaire: U=229.90V I=0.0483A P=7.68W PF=0.6915 4.9999

Test Report PPP 11118B: 2020 Rev.00

ID: 107082

Revision: 0 - released

