## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ORIC	)N
-------------------------------------	----

Supplier's address: Qualitätssicherung, Oberlaaerstraße 284, 1230 Wien, AT

Model identifier: LED 0,7a 0,7W SMD(9pcs) 67x10mm 3000K

_	•			
Type	Λt	light	COLL	rca.
IVDE	VI.	HEILL	SOU	LC.

Type of light source:				
Lighting technology used:	LED	Non-directional or directional:	NDLS	
Light source cap-type	LED module			
(or other electric interface)				
Mains or non-mains:	NMLS	Connected light source (CLS):	No	
Colour-tuneable light source:	No	Envelope:	-	
High luminance light source:	No			
Anti-glare shield:	No	Dimmable:	Yes	
Product parameters				
Parameter	Value	Parameter	Value	
General product parameters:				
Energy consumption in on-	1	Energy efficiency	F	

Product parameters				
Parameter		Value	Parameter	Value
	General product parameters:			
<u> </u>	nption in on- 00 h), rounded st integer	1	Energy efficiency class	F
dicating if it refe a sphere (360º)	s flux (фuse), in- ers to the flux in , in a wide cone errow cone (90º)	75 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	0,7	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00
(P <sub>net</sub> ) for CLS, 6	candby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	80
Outer dimen-	Height	67	Spectral power dis-	See image
sions without	Width	10	tribution in the	in last page
separate con- trol gear, light- ing control	Depth	2	range 250 nm to 800 nm, at full-load	

parts and non- lighting con- trol parts, if any (millime- tre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordi-	0,430
		nates (x and y)	0,399
Parameters for LED and OLED light sources:			
R9 colour rendering index value	1	Survival factor	1,00
the lumen maintenance factor	0,96		


(a)'-': not applicable; (b)'-': not applicable;




Page 18 of 20



Test Data Sheet 7: Luminous intensity distribution diagram

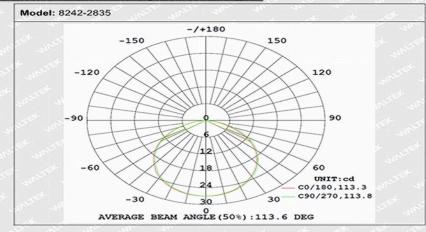

## Test Data Sheet 8: Spectral power distribution

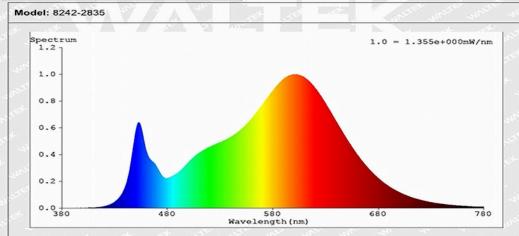

Waltek Testing Group (Foshan) Co., Ltd. http://www.waltek.com.cn

WT-510-201-12-A