## **Product Information Sheet**

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or	trade mark:	ORION
--------------------	-------------	-------

Supplier's address: Qualitätssicherung, Oberlaaerstraße 284, 1230 Wien, AT

Model identifier: LED 6bc 6W COB 13,5x13,5mm 3000K

Tν	pe	of	light	source	:
٠,	<b>P</b> C	٠.		504.00	••

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type	LED module		
(or other electric interface)			
Mains or non-mains:	NMLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes
	Droduct para	motors	

## **Product parameters**

		Product parai	meters	
Parameter		Value	Parameter	Value
		General product p	arameters:	
Energy consur mode (kWh/10 up to the neare	00 h), rounded	8	Energy efficiency class	F
dicating if it refe a sphere (360º)	s flux (фuse), iners to the flux in, in a wide cone errow cone (90º)	750 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	3 000
On-mode pow pressed in W	ver (P <sub>on</sub> ), ex-	8,0	Standby power (P <sub>sb</sub> ), expressed in W and rounded to the sec- ond decimal	0,00
(P <sub>net</sub> ) for CLS, 6	candby power expressed in W the second dec-	-	Colour rendering in- dex, rounded to the nearest integer, or the range of CRI-val- ues that can be set	93
Outer dimen-	Height	14	Spectral power dis-	See image
sions without	Width	14	tribution in the	in last page
separate con- trol gear, light- ing control	Depth	1	range 250 nm to 800 nm, at full-load	

parts and non- lighting con- trol parts, if any (millime- tre)			
Claim of equivalent power <sup>(a)</sup>	-	If yes, equivalent power (W)	-
		Chromaticity coordi-	0,426
		nates (x and y)	0,387
Parameters for LED and OLED lig	tht sources:		
R9 colour rendering index value	69	Survival factor	1,00
the lumen maintenance factor	0,96		

(a)'-': not applicable; (b)'-': not applicable;




Clause

 BST Testing (Shenzhen)
 Report No.:

 Requirement + Test
 Result - Remark
 Verdict

R9 colour rendering index value	69	Survival factor	1,00
the lumen maintenance factor	0.96		
Parameters for LED and OLED mains li	ght sources:		
displacement factor (cos φ1)	1	Colour consistency in McAdam ellipses	5.5
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-	If yes then replacement claim (W)	-
Flicker metric (Pst LM)	0.0	Stroboscopic effect metric (SVM)	0.0

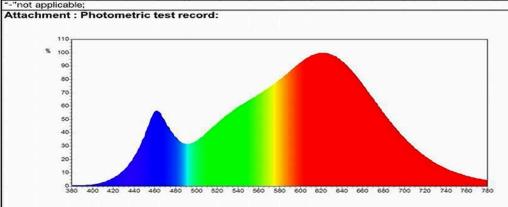

Add: No.7, New Era Industrial Zone, Guantian, Bao'an District, Shenzhen, Guangdong, China Certificate Search: http://www.bst-lab.com, Tel:400-882-6168, 8009990305, E-mail:christina@bst-lab.com