

Product Information Sheet

COMMISSION DELEGATED REGULATION (EU) 2019/2015 with regard to energy labelling of light sources

Supplier's name or trade mark: ORION

Supplier's address: Qualitätssicherung, Oberlaaerstraße 284, 1230 Wien, AT

Model identifier: LM E14/2W klar (Kerze/2700K/180lm)

Type of light source:

Lighting technology used:	LED	Non-directional or directional:	NDLS
Light source cap-type (or other electric interface)	E14		
Mains or non-mains:	MLS	Connected light source (CLS):	No
Colour-tuneable light source:	No	Envelope:	-
High luminance light source:	No		
Anti-glare shield:	No	Dimmable:	Yes

Product parameters

Parameter	Value	Parameter	Value
General product parameters:			
Energy consumption in on-mode (kWh/1000 h), rounded up to the nearest integer	2	Energy efficiency class	F
Useful luminous flux (ϕ_{use}), indicating if it refers to the flux in a sphere (360°), in a wide cone (120°) or in a narrow cone (90°)	180 in Sphere (360°)	Correlated colour temperature, rounded to the nearest 100 K, or the range of correlated colour temperatures, rounded to the nearest 100 K, that can be set	2 700
On-mode power (P_{on}), expressed in W	2,0	Standby power (P_{sb}), expressed in W and rounded to the second decimal	0,00
Networked standby power (P_{net}) for CLS, expressed in W and rounded to the second decimal	-	Colour rendering index, rounded to the nearest integer, or the range of CRI-values that can be set	80
Outer dimensions without separate control gear, lighting control	Height	Spectral power distribution in the range 250 nm to 800 nm, at full-load	See image in last page
	Width		
	Depth		

parts and non-lighting control parts, if any (millimetre)				
Claim of equivalent power ^(a)	Yes	If yes, equivalent power (W)	18	
		Chromaticity coordinates (x and y)	0,463 0,420	
Parameters for LED and OLED light sources:				
R9 colour rendering index value	0	Survival factor	0,90	
the lumen maintenance factor	0,94			
Parameters for LED and OLED mains light sources:				
displacement factor (cos ϕ_1)	0,50	Colour consistency in McAdam ellipses	6	
Claims that an LED light source replaces a fluorescent light source without integrated ballast of a particular wattage.	-(b)	If yes then replacement claim (W)	-	
Flicker metric (Pst LM)	1,0	Stroboscopic effect metric (SVM)	0,4	

(a) '-': not applicable;

(b) '-': not applicable;


Table 3 : DIM-C35-E14-2W-Clear-2700K

Sample No.	Initial Φuse (lm)	3600H Φuse (lm)	XLMF/MIN% at 3600H	Survival factor at 3600H	Measured beam angle (°)	Measured I _{max} (cd)	Measured light output within π sr
1#	185.9	174.9	94.1%	Yes	-	-	-
2#	186.7	175.9	94.2%	Yes	-	-	-
3#	189.6	178.4	94.1%	Yes	-	-	-
4#	188.8	177.8	94.2%	Yes	-	-	-
5#	191.5	180.8	94.4%	Yes	-	-	-
6#	185.3	174.4	94.1%	Yes	-	-	-
7#	189.3	177.9	94.0%	Yes	-	-	-
8#	189.6	179.0	94.4%	Yes	-	-	-
9#	186.5	175.7	94.2%	Yes	-	-	-
10#	189.1	177.9	94.1%	Yes	-	-	-
Average	188.2	177.3	94.2%	Yes	-	-	-
Required	≥180	--	≥ 94%	≥ 90%	-	-	-

Table 4 for model LED driver

Sample No.	Measured voltage(V)	Measured current (mA)	Input wattage (W)	Output power (W)	Efficiency (%)	P _{no} (W)	P _{sb} (W)	P _{net} (W)
1#	--	--	--	--	--	--	--	--
2#	--	--	--	--	--	--	--	--
3#	--	--	--	--	--	--	--	--
Average	--	--	--	--	--	--	--	--
Required	--	--	--	--	--	--	--	--

Table 5: Spectrum & Polar Plot of DIM-C35-E14-2W-Clear-2700K

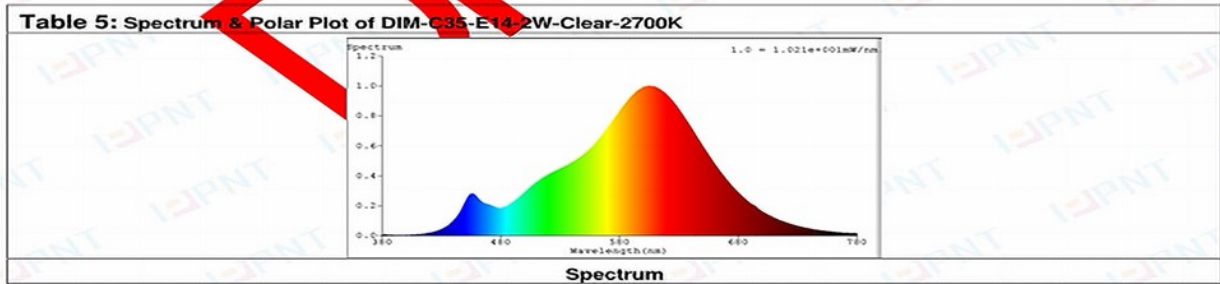

Pioneer Testing Technology
(Hangzhou) Co., Ltd
铂恩检测技术（杭州）有限公司

Room 401, Building 41, No.536 Shunfeng Road,
Yuhang District, Hangzhou City 311199, Zhejiang
Province, China.

Tel: +86-13336138598
Email: pnt001@pnt-lab.com